

the tent 4x3

Product sheet

This design and this product
are protected worldwide.
Designed in Belgium.

Characteristics



Installation
with 1 person



Setup in less than 5'



Aluminum tubes
27x20x2mm and 20x20x1.5mm
(70% recycled)



HMPE cables
(steel strenght x5)



On wheels





Capacity of
10 people




Up to 37m² of
printable area

Open dimensions (cm)

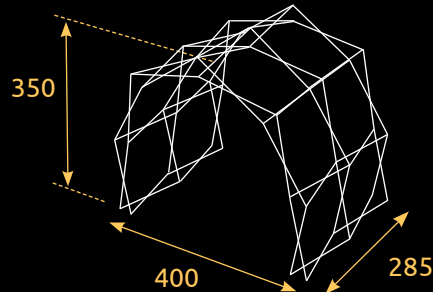


Closed dimensions ... (cm)



50kg

... with membrane on (cm)



60kg

Documentation




konligo.com/download/

Installation




CAUTION


To install or desmount you need at
least a space of 7,5m x 2,85m x 3,55m

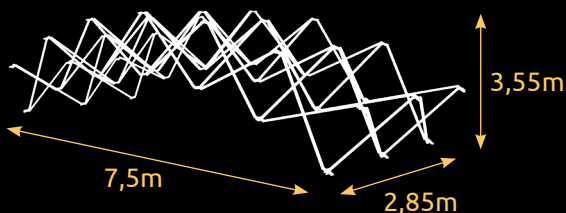

Stage & floor dimensions



Inside the structure
3m x 3m



Under the structure
5m x 3m

Unfold the structure first,
and then lift it on the stage

Anchoring & ballast weight



CAUTION

For your safety, please respect the ballast weight !



1 : Total Ballast Weight on feet (kg)


2 : Guying lines: total anchoring on each side (kg)



Wind speed



Outside covering




Outside covering
+Backdrop



Wind speed	1	2	1	2
0 km/h	1	2	0	-
30 km/h	1	2	160	-
45 km/h	1	2	390	-
62 km/h*	1	2	400	250
75 km/h*	1	2	570	370

* Above 45km/h, guying lines are necessary. Both ballast on feet and guying lines should be used simultaneously.

Disposition of weights on foot plates (1)

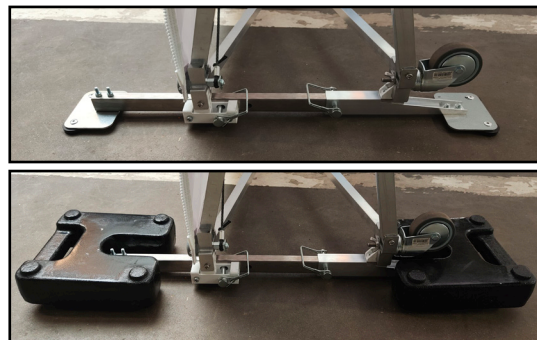

Placement of the guying lines (2)

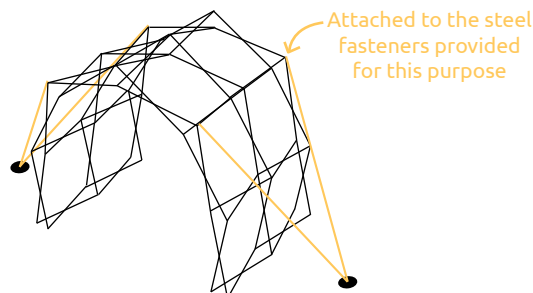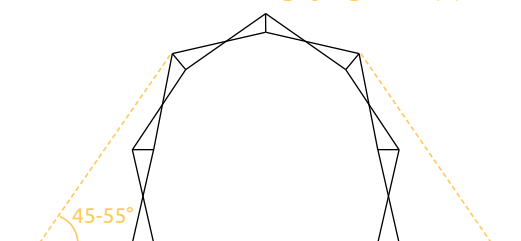

Bearing load capacity




1 : Maximum load on the structure (kg)


2 : Maximal load in a diameter of 1.3m (kg)



Wind speed



Outside covering



Outside covering
+Backdrop

Wind speed	1	2	1	2
0 km/h	1	2	160*	20*
30 km/h	1	2	120	15
45 km/h	1	2	55	7
62 km/h	1	2	90	11
75 km/h	1	2	45	5

* Above 80kg of total load or above 10kg per point, a minimum ballast weight off 150kg should be added (as shown on image (1)).

Loads can be hanged on the connectors or directly on the bars.

Example of maximum allowed loading on the facade for 0km/h:

